

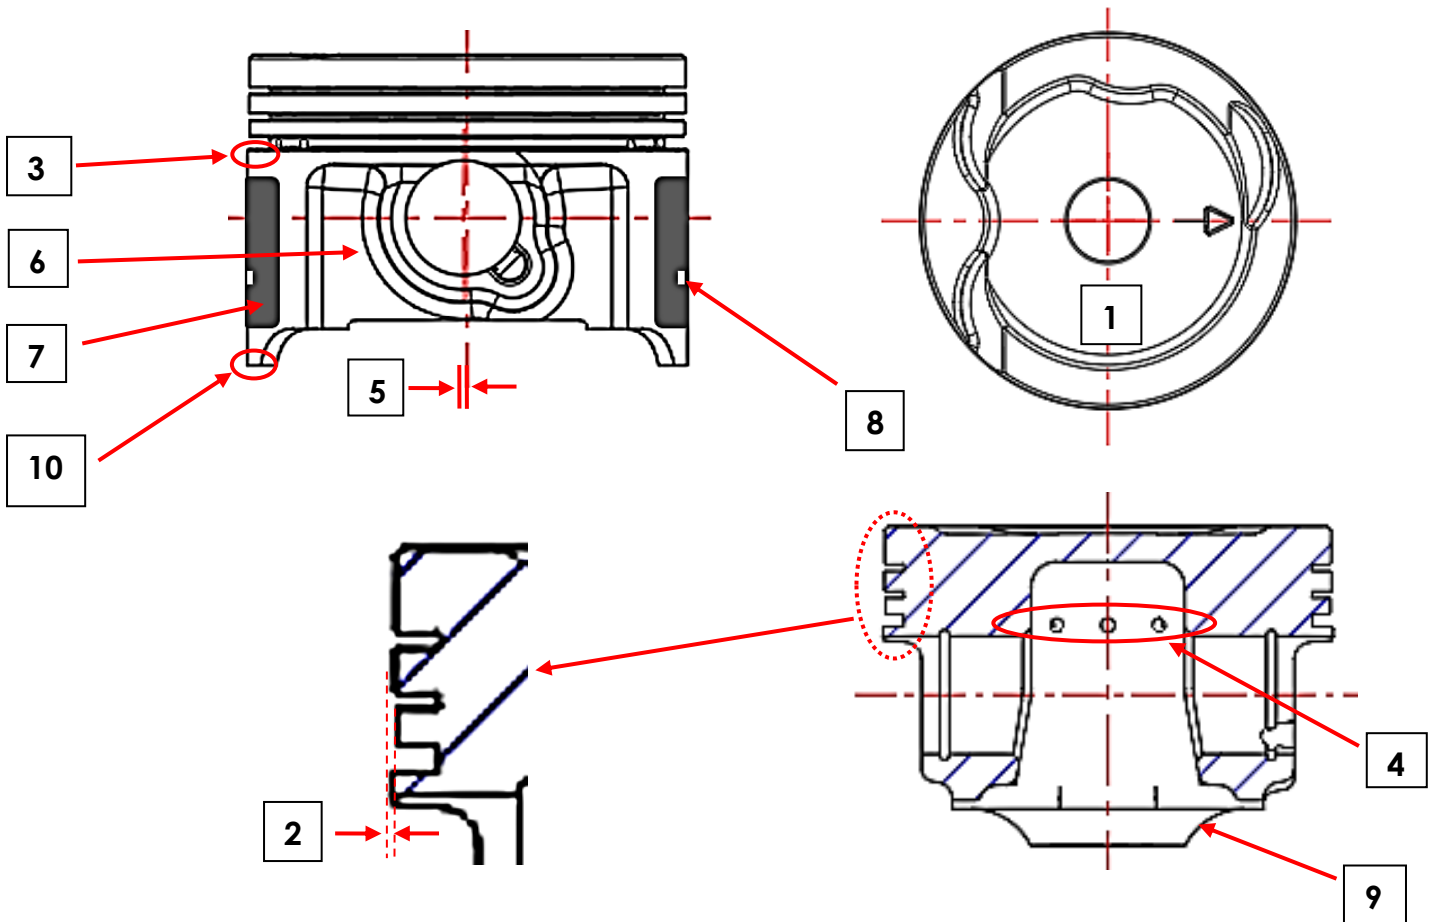


USHA is pleased to launch 'TVS NTORQ BS IV' piston assembly in its aftermarket bi-wheeler product range.



This piston assembly has following special features: -

PISTON:-



Unique features of USHA 'TVS NTORQ BS IV' piston are as follows: -

SL. NO.	SPECIAL FEATURE	BENEFITS TO CUSTOMER
1)	AS CAST CROWN: Crown of the piston is as cast for better grain structure which improves piston strength & heat resistance etc.	<ul style="list-style-type: none"> Improves piston life
2)	CUT BACK IN SECOND RING LAND: This piston is provided with a cut back in second ring land for better seating, stability & functioning of intermediate ring.	<ul style="list-style-type: none"> Helps in controlling blow-by & reduces oil consumption
3)	CHAMFER AT BOTTOM OF OIL RING GROOVE: An all-round chamfer is provided just below the oil ring groove area.	<ul style="list-style-type: none"> Provides all time lubrication to piston skirt No piston seizure in extreme limits of normal working conditions
4)	HOLES IN OIL RING GROOVE AREA: 05 nos. of holes are provided in the oil ring groove on either side of piston skirt, half in groove & half in skirt.	<ul style="list-style-type: none"> Faster drainage of excess oil Reduces oil consumption
5)	PISTON - PIN BORE OFFSET: Piston is provided with piston pin bore offset to avoid piston slap. Piston pin bore offset means that the centre line of piston is slightly offset from the centre line of pin bore. Due to this offset, piston tilts at TDC & BDC smoothly & prevents slapping with cylinder surface.	<ul style="list-style-type: none"> Reduced engine noise
6)	AS CAST RELIEF IN PIN BORE AREA: As cast relief in pin bore area helps in faster drainage of oil towards sump & also avoids chances of seizure on minor axis.	<ul style="list-style-type: none"> Low oil consumption Longer life
7)	'Nano-friKS COATING' ON PISTON SKIRT:	<ul style="list-style-type: none"> Helps in initial lubrication & seizure free operation Better wear resistance Reduces engine noise
8)	MEASURING POINTS ON PISTON SKIRT:	<ul style="list-style-type: none"> Provided for easy diameter verification
9)	SLIPPER DESIGN: Slipper design helps in reducing piston weight.	<ul style="list-style-type: none"> Improves fuel efficiency Low noise during engine working
10)	SCRAPPING CHAMFER: A smooth chamfer is provided at the bottom end of the piston skirt.	<ul style="list-style-type: none"> Helps in regulating oil supply, reduces skirt wear & hence longer life

TECHNICAL DATA – 'TVS NTORQ BS IV' PISTON

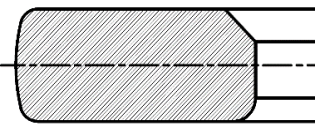
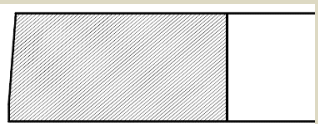
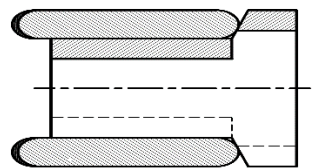
USHA CODE → **NCS94**

Nominal Bore Diameter	mm	53.50
Piston Diameter	STD Size mm	53.457
Recommended Piston-Liner Clearance	mm	0.043
Compression Height	mm	19.90
Total Height	mm	37.90
Gudgeon Pin Length X OD	mm	38.0 X 14.0


PISTON RINGS:-

USHA '**TVS NTORQ BS IV**' piston is supplied with a unique '**HPVENT**' ring set for low oil & fuel consumption. The technical details of '**HPVENT**' ring set are as under:

TECHNICAL DATA – 'TVS NTORQ BS IV' – 'HPVENT' RINGS

Ring	Ring Configuration	Axial Thickness (mm)	Closed Gap		Surface Treatment	Cross Section
			(mm)	(Thou)		
Top	Steel Inside Bevel (HPIBGN)	0.80	0.10-0.25	04-10	Gas Nitriding	
Second	Special Steel Taper (TSS)	0.80	0.10-0.25	04-10	Parkerising	
Oil	RIKVENT	1.50	0.20-0.70 (Rails)	08-28	Chrome Plating on Rails/ Parkerising	

Above features make USHA '**TVS NTORQ BS IV**' piston assembly unique, produced to give better performance & longer life.



Technical Product News is an exclusive update of product & information from
Shriram Pistons & Rings Ltd., 3rd Floor, Himalaya House, 23, Kasturba Gandhi Marg, New Delhi-110001
 Tel: 011-46451100, 23315941, Email: tss@shrirampistons.com, Website: www.shrirampistons.com