



















TRACTOR RANGE - CRANKSHAFT

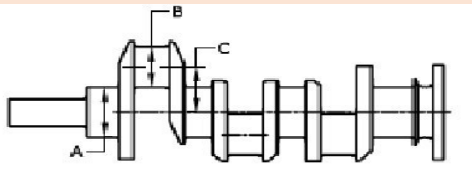SL No.	Model	No. of Cyl.	Unit					Material	SPR Part No.
				A	B	C			
1		1	INCHES MM	2.953/2.756 75.00/70.00	2.953 75.00	2.953 75.00	CK 45	CS-1997	
2		2	INCHES MM	2.559/2.756 65.00/70.00	2.559 65.00	2.461 62.50	CK 45	CS-2083	
3		3	INCHES MM	2.559 65.00	2.362 60.00	2.461 62.50	CK 45	CS-2119	
4		3	INCHES MM	2.559 65.00	2.362 60.00	2.461 62.50	CK 45	CS-2112	
5		2	INCHES MM	3.156 80.17	2.950 74.92	2.362 60.00	CK 45	CS-1998	
6		3	INCHES MM	3.353 85.17	2.598 66.00	2.067 52.50	CK 45	CS-1999	
7		3	INCHES MM	3.353 85.17	2.598 66.00	2.362 60.00	CK 45	CS-2000	








NOTE:- A- MAIN JOURNAL BEARING DIAMETER B- CRANK PIN JOURNAL DIAMETER C- THROW (2 THROW=STROKE LENGTH)


TRACTOR RANGE - CRANKSHAFT

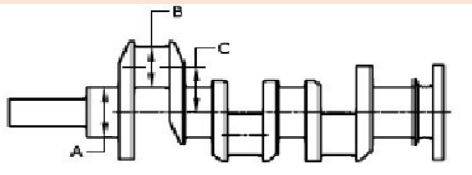SL No.	Model	No. of Cyl.	Unit					Material	SPR Part No.
				A	B	C			
8		3	INCHES MM	2.283 58.00	2.047 52.00	2.165 55.00	CK 45	CS-2002	
9		3	INCHES MM	3.372 85.65	2.750 69.85	2.100 53.34	CK 45	CS-2003	
10		3	INCHES MM	3.372 85.65	2.750 69.85	2.303 58.50	CK 45	CS-2004	
11		3	INCHES MM	3.372 85.64	2.750 69.84	2.102 53.40	S.G. IRON	CS-2072	
12		2	INCHES MM	2.126 54.00	1.750 44.46	2.000 50.80	CK 45	CS-2009	
13		3	INCHES MM	2.126 54.00	1.750 44.46	1.890 48.00	CK 45	CS-2010	
14		3	INCHES MM	2.126 54.00	1.750 44.46	2.000 50.80	CK 45	CS-2011	
NOTE:- A- MAIN JOURNAL BEARING DIAMETER B- CRANK PIN JOURNAL DIAMETER C- THROW (2 THROW=STROKE LENGTH)									










TRACTOR RANGE - CRANKSHAFT

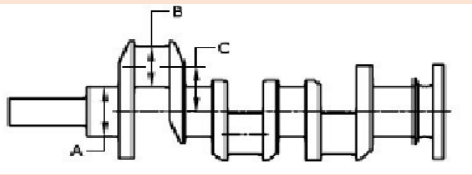







SL No.	Model	No. of Cyl.	Unit					Material	SPR Part No.
				A	B	C			
15		3	INCHES MM	2.126 54.00	2.126 54.00	2.000 50.80	CK 45	CS-2046	
16		2	INCHES MM	2.126 54.00	2.126 54.00	2.000 50.80	CK 45	CS-2082	
17		3	INCHES MM	2.126 54.00	1.750 44.46	1.909 48.50	CK 45	CS-2013	
18		4	INCHES MM	2.126 54.00	1.750 44.46	1.890 48.00	CK 45	CS-2014	
19		4	INCHES MM	2.126 54.00	1.750 44.46	2.000 50.80	CK 45	CS-2064	
20		4	INCHES MM	2.126 54.00	2.126 54.00	2.000 50.80	CK 45	CS-2033	
NOTE:-									
A- MAIN JOURNAL BEARING DIAMETER		B- CRANK PIN JOURNAL DIAMETER		C- THROW (2 THROW=STROKE LENGTH)					

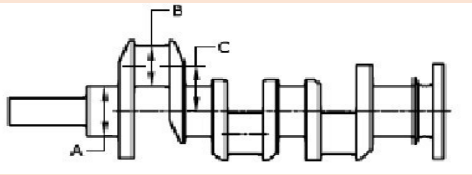

TRACTOR RANGE - CRANKSHAFT

Sl No.	Model	No. of Cyl.	Unit					Material	SPR Part No.				
				A	B	C							
21		JOHN DEERE	3	INCHES MM	3.124 79.34	3.065 77.84	2.504 63.60	CK 45	CS-2069				
22		KIRLOSKAR RA100 (2 CYLINDER)	2	INCHES MM	2.752 69.90	2.752 69.90	2.165 55.00	CK 45	CS-2035				
23		KIRLOSKAR RA100 (3 CYLINDER)	3	INCHES MM	2.752 69.90	2.752 69.90	2.165 55.00	CK 45	CS-2036				
24		PERKINS P-3 (BSF)/3.152 ROPE SEAL	3	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45/ EN 19	CS-2048				
25		PERKINS P-3 (UNF)/3.152 ROPE SEAL	4	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45/ EN 19	CS-2049				
26		PERKINS P-3 (BSF) (WITH BOLT)	3	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45	CS-2113				
NOTE:-								A- MAIN JOURNAL BEARING DIAMETER		B- CRANK PIN JOURNAL DIAMETER		C- THROW (2 THROW=STROKE LENGTH)	








TRACTOR RANGE - CRANKSHAFT

Sl No.	Model	No. of Cyl.	Unit					Material	SPR Part No.
				A	B	C			
27		4	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45/ EN 19	CS-2050	
28		4	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45/ EN 19	CS-2051	
29		3	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45/ EN 19	CS-2113	
30		3	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45/ EN 19	CS-2053	
31		3	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45	CS-2052	
32		4	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45	CS-2091	
33		4	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45/ EN 19	CS-2055	

NOTE:- A- MAIN JOURNAL BEARING DIAMETER B- CRANK PIN JOURNAL DIAMETER C- THROW (2 THROW=STROKE LENGTH)

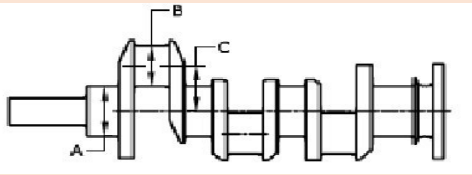

TRACTOR RANGE - CRANKSHAFT






Sl No.	Model	No. of Cyl.	Unit					Material	SPR Part No.
				A	B	C			
34		4	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45/ EN 19	CS-2108	
35		4	INCHES MM	2.749 69.83	2.249 57.12	2.500 63.50	CK 45	CS-2054	
36		2	INCHES MM	2.756 70.00	2.362 60.00	2.323 59.00	CK 45	CS-2059	
37		3	INCHES MM	2.756 70.00	2.362 60.00	2.323 59.00	CK 45	CS-2018	
38		4	INCHES MM	2.756 70.00	2.362 60.00	2.323 59.00	CK 45	CS-2008	
39		3	INCHES MM	2.751 69.90	2.405 61.11	2.165 55.00	CK 45	CS-2123	
NOTE:-				A- MAIN JOURNAL BEARING DIAMETER		B- CRANK PIN JOURNAL DIAMETER		C- THROW (2 THROW=STROKE LENGTH)	

TRACTOR RANGE - CRANKSHAFT

SL No.	Model	No. of Cyl.	Unit					Material	SPR Part No.
				A	B	C			
40		3	INCHES MM	2.751 69.90	2.405 61.11	2.283 58.00	CK 45	CS-2126	
41		3	INCHES MM	2.754 69.94	2.754 69.94	2.283 58.00	CK 45	CS-1990	
42		2	INCHES MM	2.126 54.00	2.126 54.00	2.165 55.00	CK 45	CS-2043	
43		3	INCHES MM	2.126 54.00	2.126 54.00	2.165 55.00	CK 45	CS-2044	
44		4	INCHES MM	2.126 54.00	2.126 54.00	2.165 55.00	CK 45	CS-2045	
45		2	INCHES MM	2.756 70.00	2.362 60.00	2.165 55.00	CK 45	CS-2077	
NOTE:- A- MAIN JOURNAL BEARING DIAMETER B- CRANK PIN JOURNAL DIAMETER C- THROW (2 THROW=STROKE LENGTH)									

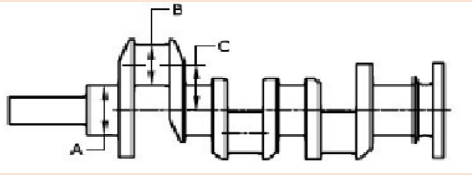

TRACTOR RANGE - CRANKSHAFT

Sl No.	Model	No. of Cyl.	Unit					Material	SPR Part No.
				A	B	C			
46		ZETOR 3511	3	INCHES MM	2.756 70.00	2.362 60.00	2.165 55.00	CK 45	CS-1993
47		ZETOR 3522	3	INCHES MM	2.756 70.00	2.362 60.00	2.165 55.00	CK 45	CS-1994
48		ZETOR 5911	4	INCHES MM	2.756 70.00	2.362 60.00	2.165 55.00	CK 45	CS-1995
49		KUBOTA TILLER	1	INCHES MM	1.773/2.165 45.03/55.00	2.085 52.96	2.067 52.50	EN 9	CS-1972
<p>NOTE:- A- MAIN JOURNAL BEARING DIAMETER B- CRANK PIN JOURNAL DIAMETER C- THROW (2 THROW=STROKE LENGTH)</p>									